

1. The system includes a first modem (1) and a second modem (4) connected to a packet network (5) via voice gateways (2, 3).
 2. The first modem (1) is connected to the first voice gateway (2).
 3. The second modem (4) is connected to the second voice gateway (3).
 4. The packet network (5) connects the two voice gateways (2, 3).
 5. The system is designed for V.42bis data compression and error correction.

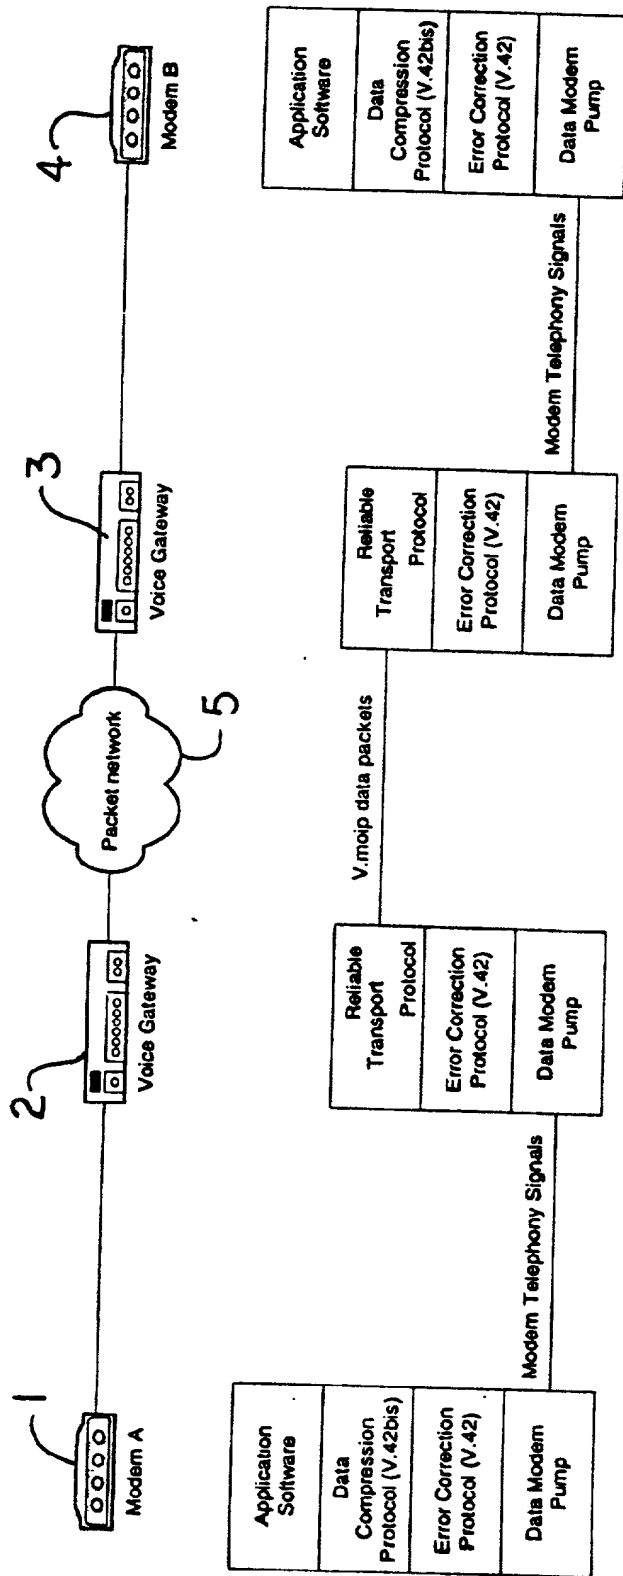


FIGURE 1

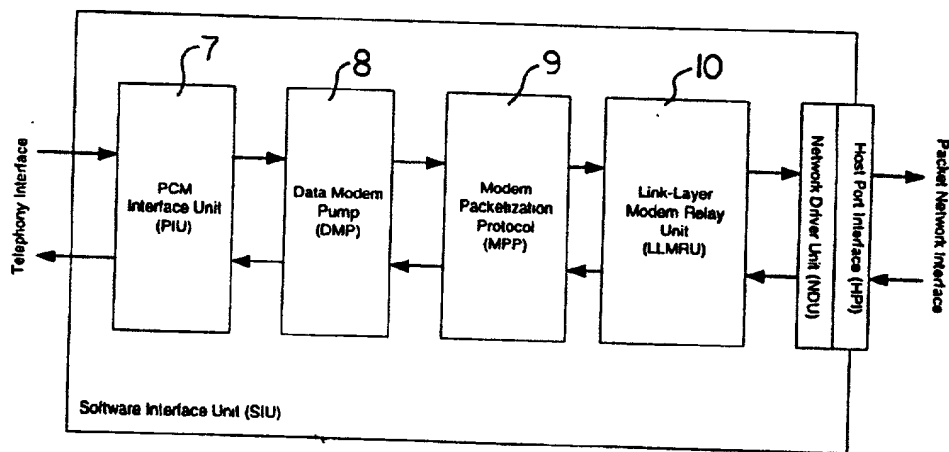


FIGURE 2A

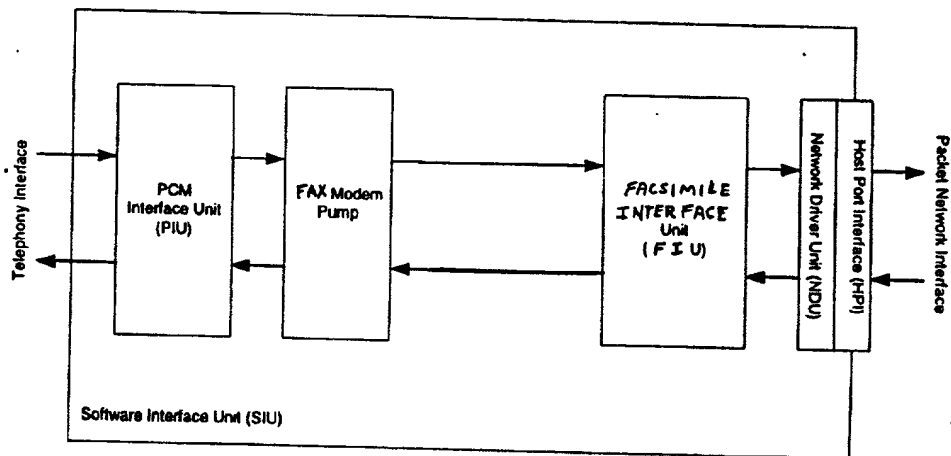


FIGURE 2B

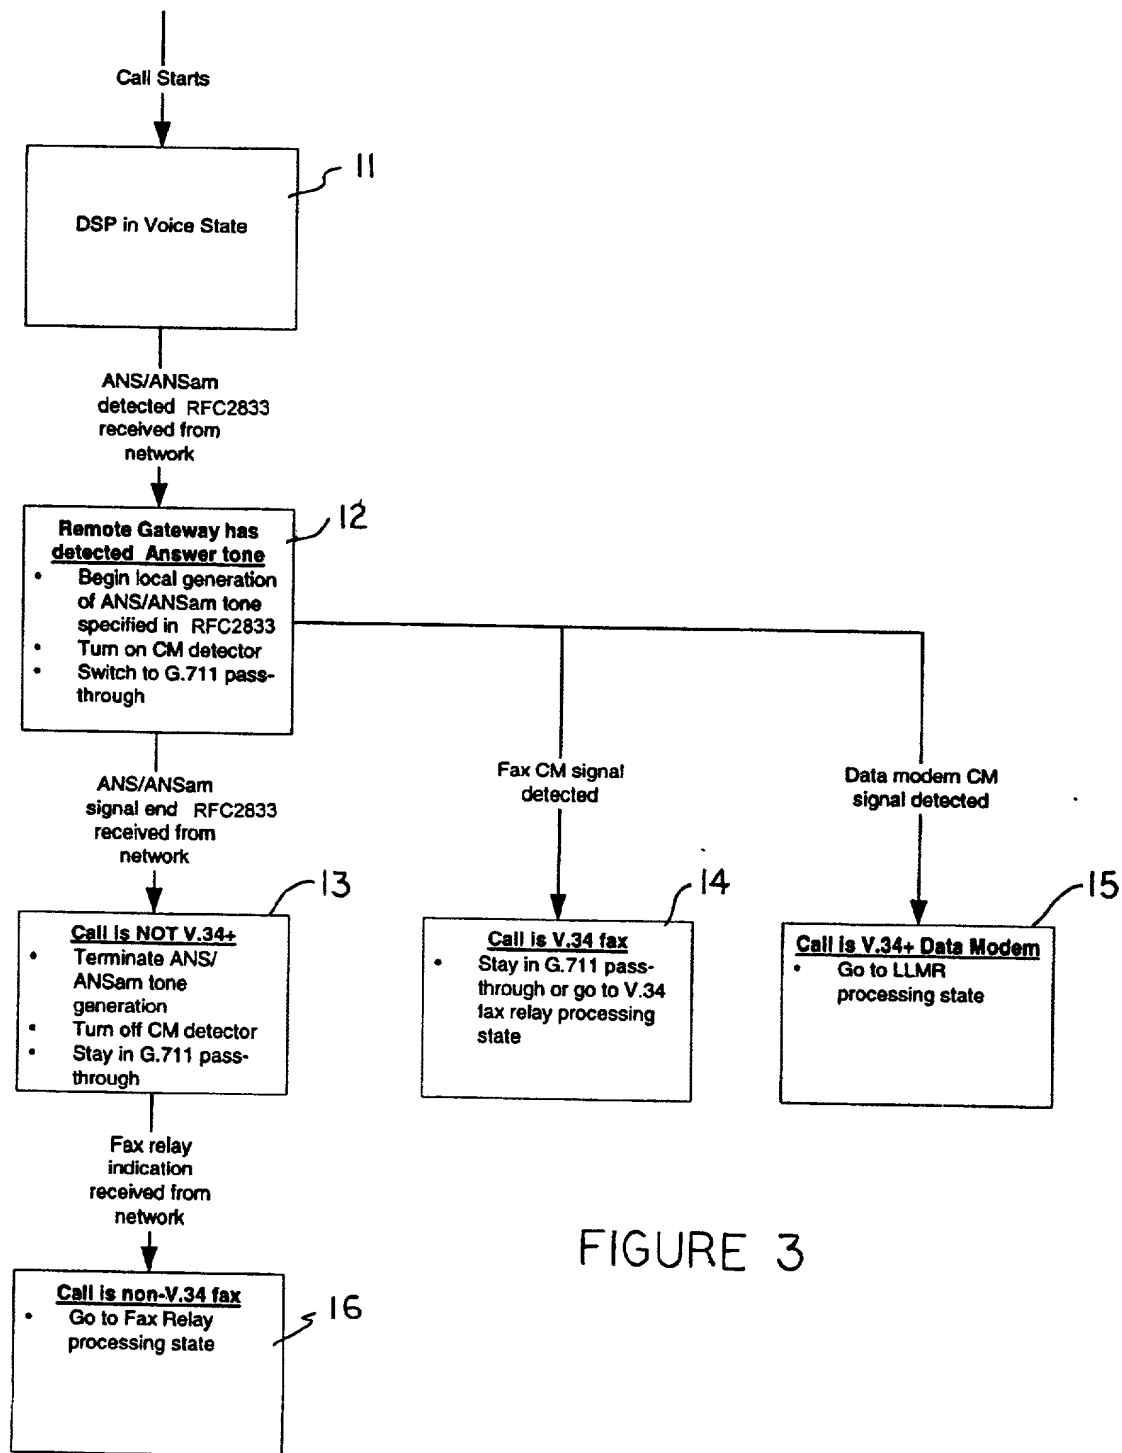


FIGURE 3

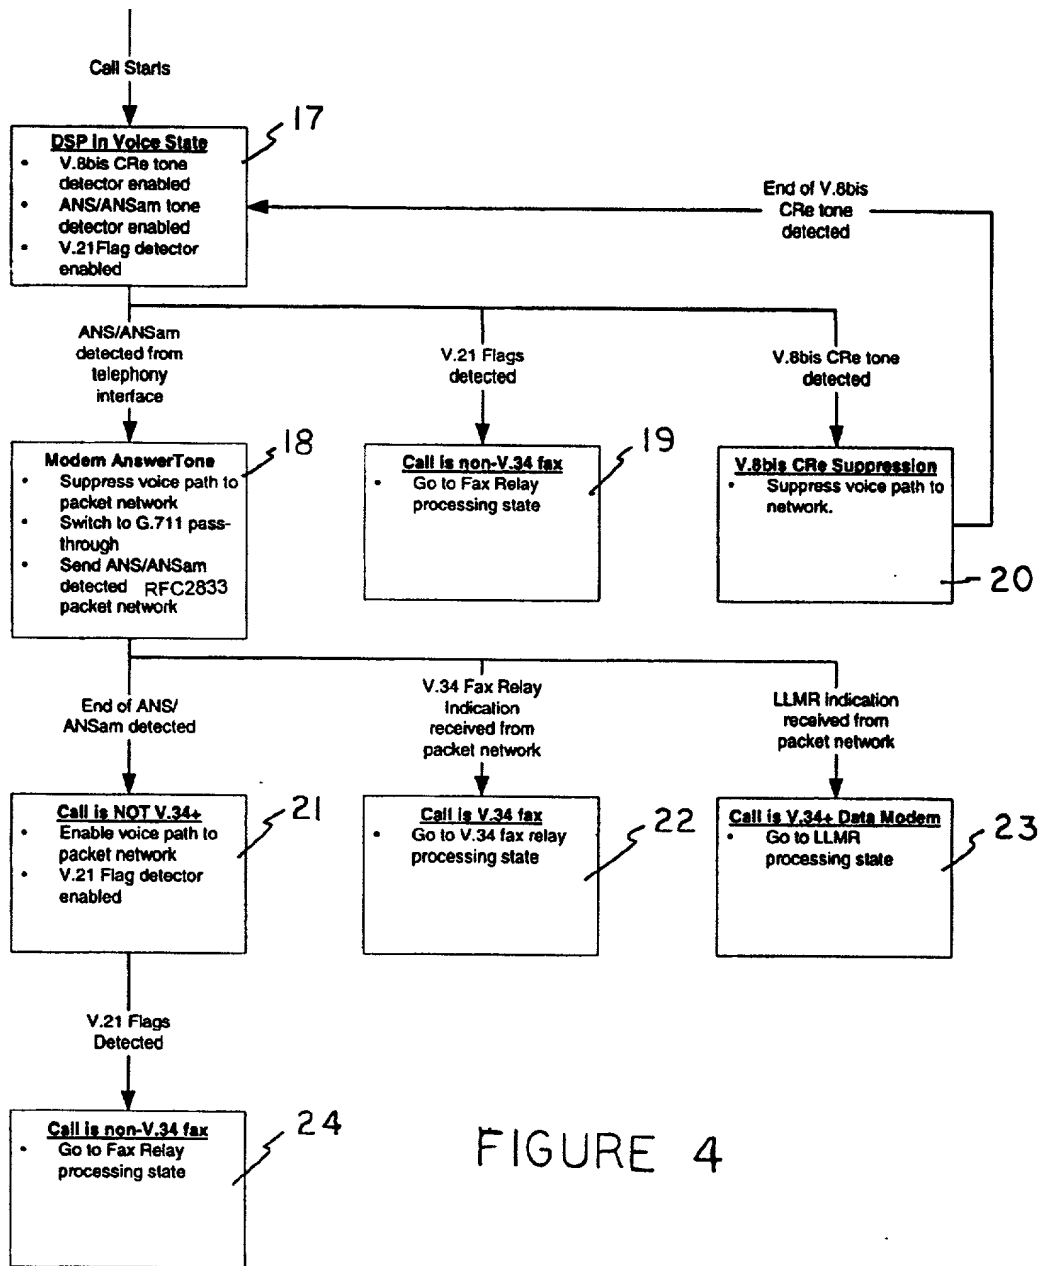


FIGURE 4